




Manhole Brace

Features

- 4-Way hydraulic support with high strength, telescoping steel tubing over-sleeves
- Non-rigid corner brackets
- Individual legs for on site assembly and easy transportation
- Quick connect pins & keepers
- Flexibility to fit square or rectangular excavations
- 4-Way hose bridal for simultaneous cylinder pressurization
- 4-corner lifting eye for installation and removal
- HVP-2000 high volume hand pump or HP-200 electric pump

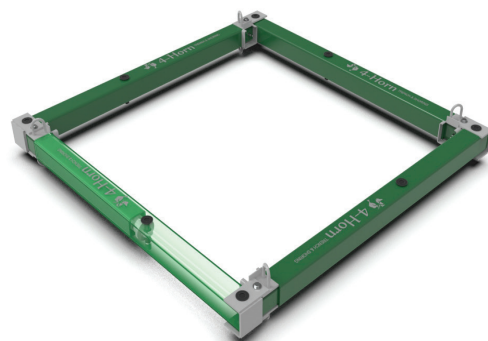

Specifications

MODEL	CYL. DIA.	SPAN		MAXIMUM DEPTH OF EXCAVATION (FEET)					
	INCH	FEET		4 FT. O.C. VERT SPACING			3 FT. O.C. SPACING SPACING		
		MIN.	MAX	A&B	C-60	C	A&B	C-60	C
2" CLY WITH 4" BOX TUBING OVERSLEEVE									
2-MHB-4-5	2	5	8	25	20	10	25	25	12
2-MHB-4-6	2	6	9	25	20	10	25	25	12
2-MHB-4-7	2	7	10	25	20	10	25	25	12
3" CLY WITH 6" BOX TUBING OVERSLEEVE									
3-MHB-6-6	3	6	9	25	25	12	25	25	16
3-MHB-6-7	3	7	10	25	25	12	25	25	16
3-MHB-6-8	3	8	11	25	25	12	25	25	16
3-MHB-6-9	3	9	12	19	14	7	25	20	9
3-MHB-6-10	3	10	13	17	13	6	23	18	8
3-MHB-6-11	3	11	14	15	11	5	21	16	7
3-MHB-6-12	3	12	15	14	10	-	19	14	6
3-MHB-6-13	3	13	16	13	9	-	17	13	5
3-MHB-6-14	3	14	17	11	8	-	15	11	-
3-MHB-6-15	3	15	18	9	7	-	13	10	-
3-MHB-6-16	3	16	19	8	6	-	12	9	-
3-MHB-6-17	3	17	20	7	5	-	10	8	-
3" CLY WITH 8" BOX TUBING OVERSLEEVE									
3-MHB-8-8	3	8	11	25	25	18	25	25	20
3-MHB-8-9	3	9	12	25	25	16	25	25	20
3-MHB-8-10	3	10	13	25	25	14	25	25	19
3-MHB-8-11	3	11	14	25	25	12	25	25	16
3-MHB-8-12	3	12	15	25	23	10	25	25	14
3-MHB-8-13	3	13	16	25	20	9	25	25	12
3-MHB-8-14	3	14	17	23	17	8	25	23	11
3-MHB-8-15	3	15	18	20	15	7	25	20	10
3-MHB-8-16	3	16	19	18	13	6	24	18	8
3-MHB-8-17	3	17	20	16	12	5	21	16	7
3-MHB-8-18	3	18	21	14	10	-	19	14	-
3-MHB-8-19	3	19	22	12	9	-	16	12	-
3-MHB-8-20	3	20	23	11	8	-	15	11	-
3-MHB-8-21	3	21	24	10	7	-	14	10	-